

## Moisture control with Philips' humidity sensor

*Let's make things better.*

Philips  
Components



**PHILIPS**



# Moisture control with Philips' capacitive humidity sensor

Philips' capacitive humidity sensor has already proven itself over many years as one of the most effective and economical means of measuring and controlling humidity.

The sensor operates by sensing changes in capacitance of a thin-film polymer membrane as it absorbs moisture from its surroundings. Compared with many alternatives, it's simple to operate, highly reliable and fast. What's more, its long-term characteristics are unaffected by condensation of water on the membrane surface and other aggressive pollutants in the air.

Used in, for example, home hygrometers, weather stations, air-conditioners, climate controllers and tumble dryers, it's capable of providing long, trouble-free service with minimum maintenance.

Designed for a measuring range between 10% and 90% relative humidity the sensor's relatively linear characteristic allows it to be easily incorporated into simple, inexpensive measuring circuitry.

## Features and benefits

- long-term reliability
- high sensitivity
- fast response
- high immunity against contaminants
- operates with simple measuring circuitry

## Proven in a host of applications


Important application areas where Philips' sensor has already proven itself include:

- Heating, ventilating and air-conditioning systems
- Industrial-control installations
- Climate-control systems in, for example, industrial clean rooms, operating theatres, computer rooms and green-houses
- Climatic chambers
- Drying processes
- Printing industry

## Humidity control the Philips way

Accurate measurement and control of humidity is an important requirement of today's world. The humidity of the air, i.e. the amount of water vapour it contains, influences not only our comfort but also the effectiveness of many professional and industrial processes. Though several types of electronic humidity sensor exist, Philips' capacitive sensor has long proven to be one of the most reliable, durable and easiest to use.

The sensor is made up of a polymer film coated on both sides with a very thin air-permeable gold layer to form a capacitive element. The film is clamped between spring contacts inside a perforated plastic housing. Changes in relative humidity (RH) of the surrounding air cause a change in dielectric constant of the polymer film leading to a change of sensor capacitance. The relationship between sensor capacitance and relative humidity is a rather simple one which means that the sensor can easily be incorporated into an electrical measuring circuit.

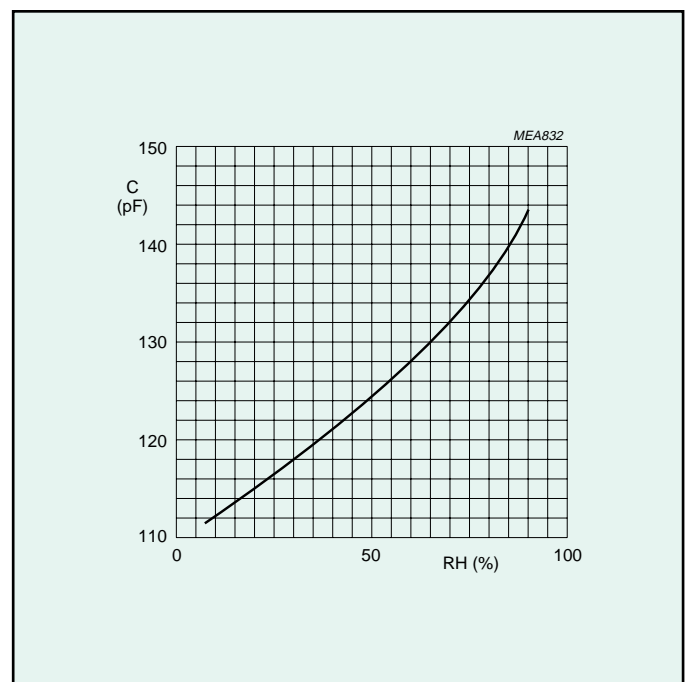

*Fig.1 A simple relationship between capacitance and RH means the sensor can easily be incorporated into an electrical measuring circuit*



Potassium carbonate is usually chosen as a reference since its RH (43.2%) falls approximately in the middle of the measuring range of the sensor and because its temperature stability is high (from 43.1%rh at 0 °C to 43.2%rh at 30 °C).

### **Response time and hysteresis**

The response time is defined as the time it takes for the sensor's reading to change by 90% of the total change following an immediate change of relative humidity. The response time obviously varies according to the relative humidity level, being shorter for low humidity levels than for higher levels.

The sensor's response also shows hysteresis due to the difference between the speed of moisture absorption and the speed of evaporation. The hysteresis value in the specification is given for steps of 10%rh allowing a stabilization time of 30 minutes between steps.

### **Maximum applied voltage**

The sensor is a tough component with high dielectric strength able to withstand both DC and AC voltages up

to 15 V. What's more, a low dissipation factor means it can accept high-amplitude measuring voltages without over heating. And in contrast to many competing technologies it meets the most stringent static-discharge specifications.

### **Operating frequency**

The sensor's dissipation factor increases with humidity. It also falls with measuring frequency to a minimum value at around 1 kHz after which it increases again. When working at low levels of humidity (< 50%rh), it's therefore possible to use relatively low (< 1 kHz) measuring frequencies. But for the most reliable results over the total operating range of the sensor, measuring frequencies should be between 1 kHz and 1000 kHz.

### **Working in aggressive atmospheres**

Although the sensor is virtually unaffected by most air pollutants including ammonia, the vapour of some solvents such as acetone will attack the foil and should be avoided when building the sensor into an assembly. Dusty environments should also be avoided since the hygroscopic properties of some dust particles can affect sensor reading if they're allowed to build up on the surface of the foil.

## **RELATIVE HUMIDITY**

The humidity of the air is a measure of the amount of water vapour it contains. At any given temperature, water will continue to be absorbed by the air either until all available water has evaporated or the air has become *saturated*. Once the air is saturated, it contains its full capacity of water and no further evaporation will take place unless the temperature increases.

### **Defining relative humidity**

*Relative humidity (RH)* is a convenient way of expressing the amount of water vapour contained in a volume of air. It's defined as the ratio (in percent) of the mass of water vapour in the air to the mass required to produce saturation at the same temperature. When the air is saturated, therefore, its RH is 100%.

The presence (or absence) of water vapour in air influences many physical, chemical and biological processes. Our comfort, for example, depends a lot on humidity since a very humid atmosphere (i.e. at or close to saturation) limits our bodies' ability to perspire and cool us. Usually, the most comfortable climatic conditions are between 45 and 65%rh and for us to remain comfortable, the humidity must decrease as the temperature rises. For example, at 30 °C, 70%rh is considered uncomfortable while 30%rh is quite tolerable.

By introducing humidity monitoring instrumentation, the energy management systems of office and industrial buildings could be better optimized and a lot of energy saved without loss of comfort by adapting the efficiency of energy management according to the season and the external climatic conditions.

## Mechanical data and ordering

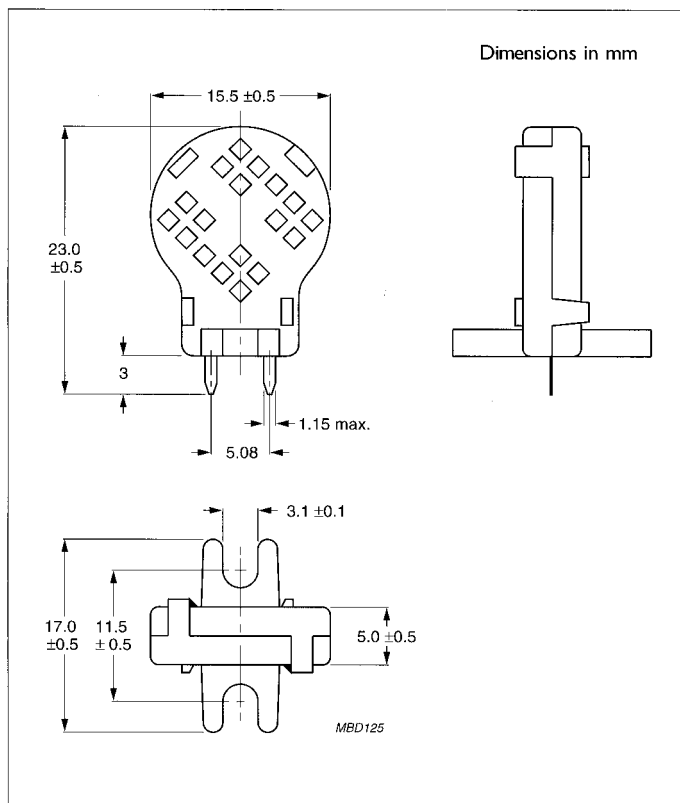


Fig.4 Component outline

### Marking

PHILIPS H1.

### Mounting

The device can be soldered directly on to a printed-circuit board or fastened with 3 mm bolts.

### Soldering

Solderability:  $\leq 240^\circ\text{C}$ ;  $\leq 4 \text{ s.}$

Resistance to heat:  $\leq 240^\circ\text{C}$ ;  $\leq 4 \text{ s.}$

### Robustness of terminations

Tensile strength: 10 N.

### Ordering code

2322 691 90001.



# Philips Components - a worldwide company

**Australia:** Philips Components Pty Ltd, NORTH RYDE,  
Tel. (02) 9805 4455, Fax. (02) 9805 4466.

**Austria:** Österreichische Philips Industrie GmbH, WIEN,  
Tel. (01) 601 01 12 41, Fax. (01) 60 101 12 11.

**Belarus:** Philips Office Belarus, MINSK,  
Tel. (5172) 200 924/733, Fax. (5172) 200 773.

**Benelux:** Philips Nederland B.V., EINDHOVEN, NL.,  
Tel. (+31 40) 2783 749, Fax. (+31 40) 2788 399.

**Brazil:** Philips Components, SÃO PAULO,  
Tel. (011) 821 2333, Fax. (011) 829 1849.

**Canada:** Philips Electronics Ltd., SCARBOROUGH,  
Tel. (0416) 292 5161, Fax. (0416) 754 6248.

**China:** Philips Company, SHANGHAI,  
Tel. (021) 6485 0600, Fax. (021) 6485 5615.

**Denmark:** Philips Components A/S, COPENHAGEN S,  
Tel. (32) 883 333, Fax. (31) 571 949.

**Finland:** Philips Components, ESPOO,  
Tel. 9 (0)-615 800, Fax. 9 (0)-615 80510.

**France:** Philips Composants, SURESNES,  
Tel. (01) 4099 6161, Fax. (01) 4099 6493.

**Germany:** Philips Components GmbH, HAMBURG,  
Tel. (040) 2489-0, Fax. (040) 2489 1400.

**Greece:** Philips Hellas S.A., TAVROS,  
Tel. (01) 4894 339/(01) 4894 239, Fax. (01) 4814 240.

**Hong Kong:** Philips Hong Kong, KOWLOON,  
Tel. 2784 3000, Fax. 2784 3003.

**India:** Philips India Ltd., MUMBAI,  
Tel. (022) 4930 311, Fax. (022) 4930 966/4950 304.

**Indonesia:** P.T. Philips Development Corp., JAKARTA,  
Tel. (021) 794 0040, Fax. (021) 794 0080.

**Ireland:** Philips Electronics (Ireland) Ltd., DUBLIN,  
Tel. (01) 76 40 203, Fax. (01) 76 40 210

**Israel:** Rapac Electronics Ltd., TEL AVIV,  
Tel. (03) 6450 444, Fax. (03) 6491 007.

**Italy:** Philips Components S.r.l., MILANO,  
Tel. (02) 6752 2531, Fax. (02) 6752 2557.

**Japan:** Philips Japan Ltd., TOKYO,  
Tel. (0) 3 3740 5135, Fax. (0) 3 3740 5035.

**Korea (Republic of):** Philips Electronics (Korea) Ltd., SEOUL,  
Tel. (02) 709 -1472, Fax. (02) 709 1480.

**Malaysia:** Philips Malaysia SDN Berhad  
Components Division, PULAU PINANG,  
Tel. (03) 750 5213, Fax. (03) 757 4880.

**Mexico:** Philips Components, EL PASO, U.S.A.,  
Tel. (915) 772 4020, Fax. (915) 772 4332.

**New Zealand:** Philips New Zealand Ltd., AUCKLAND,  
Tel. (09) 815 4000, Fax. (09) 849 7811.

**Norway:** Norsk A/S Philips, OSLO,  
Tel. (22) 74 8000, Fax. (22) 74 8341.

**Pakistan:** Philips Electrical Industries of Pakistan Ltd., KARACHI,  
Tel. (021) 587 4641-49, Fax. (021) 577 035/587 4546.

**Philippines:** Philips Semiconductors Philippines Inc., METRO MANILA,  
Tel. (02) 816 6345, Fax. (02) 817 3474.

**Poland:** Philips Poland Sp. z o.o., WARSZAWA,  
Tel. (022) 612 2594, Fax. (022) 612 2327.

**Portugal:** Philips Portuguesa S.A.,  
Philips Components: LINDA-A-VELHA,  
Tel. (01) 416 3160/416 3333, Fax. (01) 416 3174/416 3366.

**Russia:** Philips Russia, MOSCOW,  
Tel. (095) 755 6918, Fax. (095) 755 6919.

**Singapore:** Philips Singapore Pte Ltd., SINGAPORE,  
Tel. 350 2000, Fax. 355 1758.

**South Africa:** S.A. Philips Pty Ltd., JOHANNESBURG,  
Tel. (011) 470 5911, Fax. (011) 470 5494.

**Spain:** Philips Components, BARCELONA,  
Tel. (93) 301 63 12, Fax. (93) 301 42 43.

**Sweden:** Philips Components AB, STOCKHOLM,  
Tel. (+46) 8 632 2000, Fax. (+46) 8 632 2745.

**Switzerland:** Philips Components AG, ZÜRICH,  
Tel. (01) 488 22 11, Fax. (01) 481 77 30.

**Taiwan:** Philips Taiwan Ltd., TAIPEI,  
Tel. (02) 2134 2900, Fax. (02) 2134 2929.

**Thailand:** Philips Electronics (Thailand) Ltd., BANGKOK,  
Tel. (02) 745 4090, Fax. (02) 398 0793.

**Turkey:** Türk Philips Ticaret A.S., GÜLTEPE/ISTANBUL,  
Tel. (0212) 279 2770, Fax. (0212) 282 6707.

**United Kingdom:** Philips Components Ltd., DORKING,  
Tel. (01306) 512 000, Fax. (01306) 512 345.

## United States:

- Display and Wire Wound Components, ANN ARBOR, MI,  
Tel. (313) 996 9400, Fax. (313) 761 2776.

- Magnetic Products, SAUGERTIES, NY,  
Tel. (914) 246 2811, Fax. (914) 246 0487.

- Philips Components, JUPITER, FL,  
Tel. (561) 745 3300, Fax. (561) 745 3600.  
For literature: (800) 447 3762.

**Yugoslavia (Federal Republic of):** Philips Components, BELGRADE,  
Tel. (0) 11 625 344/373, Fax. (0) 11 635 777.

**For all other countries apply to:** Philips Components,  
Marketing Communications, BAE-1, P.O. Box 218, 5600 MD EINDHOVEN,  
The Netherlands, Fax. +31-40-2724 547.

COB13

© Philips Electronics N.V. 1997

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Printed in The Netherlands

9398 083 44011

Date of release: 07/97